



POWERFUL



ULTIMAX

Tungsten carbide
Self-centering point
Chiseling effect



6 cutting edges
6 lateral supports

Progressive
core spiral
Added steel



- > Anti-blocking
- > Life span
- > Hole Calibration to the diameter
- > Concentric hole

- > Increased flex Resistance
- > Quick Evacuation of debris and dust



SDS-max (ref. 166) or
SPLINE (ref. 120) shanks


For Professional Users Only !

The ULTIMAX hammer bit is designed for the professional. It has 6 cutting edges. It is made in France and meets all user requirements in terms of :

Robustness, Precision, Life Expectancy and Speed

ULTIMAX was developed by and for drilling professionals. Studies on material resistance and tests under extreme conditions have culminated in solutions to all mechanical constraints.


RESEARCH AND DEVELOPMENT

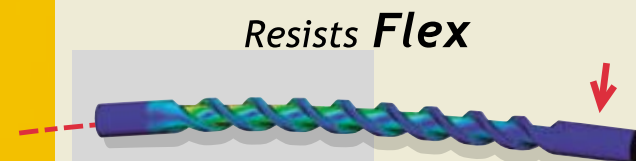

Resists **Flex**

> More Material


Flex exerted in the lower section of a drill bit is the most likely destructive factor. The progressive core of the spiral adds material and increases the rigidity in this area which is subjected to extreme pressure.

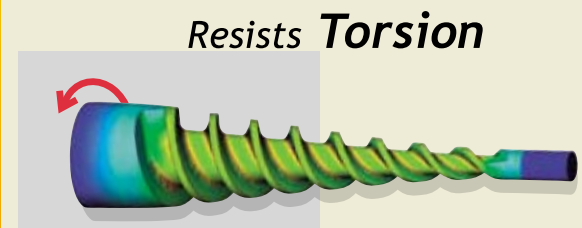

Resists **Torsion**

> Anti-blocking System

6 asymmetric cutting edges reduce the risk of blockage when in use on a particularly hard aggregate, or on rebar. The progressive core and the roundness of the flute allow optimal removal of dust and negates any risk of blocking due to dust accumulation.

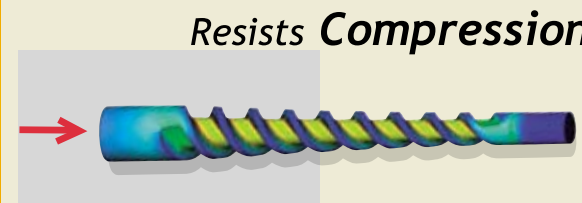

Resists **Compression**

> Heat Treatment

The hardness of concrete combined with the power of the drill unite to create compression. The heat treatment of the body allows the energy of the drill to be concentrated on the tungsten carbide tip (whilst absorbing shock waves).

PERFORMANCES

Robustness

Long Life

Precision

Speed

Complies with PGM Standards



Tested on B50 concrete with an ULTIMAX Ø 25mm x 540mm and a 5kg hammer drill on the CETOP* test bench.
* Technical Department for Drilling Tools.



+1000 HOLES

Concrete


Reinforced Concrete

Stone

Granite




NEW!
SDS-max
ULTIMAX

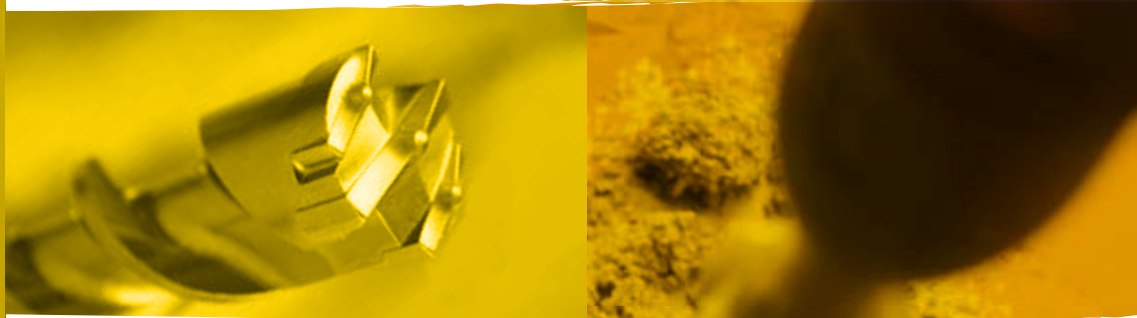

Dimensions

Packaging



Total Working Length x Total Overall

200x340 400x540 550x690 780x920 1160x1300 1360x1500

Diameter

15
16
18
19
20
22
24
25
26
28
29
30
32
35
36
38
40
42
45

Diameter	200x340	400x540	550x690	780x920	1160x1300	1360x1500
15						
16						
18						
19						
20						
22						
24						
25						
26						
28						
29						
30						
32						
35						
36						
38						
40						
42						
45						

DIAGER[®]

Rue Henri Moissan
 39802 Poligny - FRANCE
 tel. 33 (0)3 84 73 74 75 - fax 33 (0) 3 84 73 74 76
www.diager.com

DISTRIBUTED BY

REF:000098 - 15/01/2005

DIAGER[®]